

GU10 **LED**


## 6 Watt Spotlight

### Benefits

- ✓ Eco-Friendly. Perfect replacement for 60W halogen spotlights.
- ✓ Compatible with all fittings. Easy to install and operate.
- ✓ Extra-long lifespan, reducing the hassle of frequent replacements.
- ✓ Available in three colour temperatures, each with a dimmable option.
- ✓ Dimmable options compatible on leading edge and trailing edge dimmers.

### Advantages

- ✓ Excellent optical design with halogen look-alike aesthetics.
- ✓ Great consistency in colour of light.
- ✓ Manufactured to IEC standard dimensions.
- ✓ Fully ErP & CE compliant.

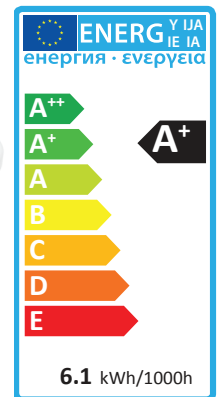

ø50mm x 54mm



### Technical information

Model	Wattage	Colour	CCT	Dimmable	ErP Lumens	ErP Wattage equiv.	Lumens per Watt	Current
GU10-6W-36-5000K	6W	Cool White	5000K	NO	460	61 W	74	53mA
GU10-6W-36-5000K-D	6W	Cool White	5000K	YES	440	66 W	75	37.4mA
GU10-6W-36-4000K	6W	Daylight	4000K	NO	460	61 W	74	53mA
GU10-6W-36-4000K-D	6W	Daylight	4000K	YES	440	66 W	75	37.4mA
GU10-6W-36-2700K	6W	Warm White	2700K	NO	440	60 W	73	53mA
GU10-6W-36-2700K-D	6W	Warm White	2700K	YES	420	62 W	70	37.4mA

### Common attributes

⚡ Voltage	220-240V
⚡ Power Factor	< 0.5
📏 Size	50 x 54 mm
🔦 Beam angle	36°
🌡 Working temperature	-20°C ~ 40°C
⚙ Operational Hz	50Hz
🕒 Lifespan	25000 hrs
👁 CRI	80
🔄 Switch Cycles	40000
🕒 Instant on	< 1s

### Compliance

- ✓ EN 55015:2013 *Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment*
- ✓ EN 61547:2009 *Equipment for general lighting purposes. EMC immunity requirements*
- ✓ EN 61000-3-3:2013 *Electromagnetic compatibility (EMC). Limits. Limitation of voltage changes, voltage fluctuations*
- ✓ EN 61000-3-2:2014 *Electromagnetic compatibility (EMC). Limits. Limits for harmonic current emissions (equipment input current ≤ 16 A per phase)*
- ✓ EN 62560:2012 *Self-ballasted LED-lamps for general lighting services by voltage SOG 50 V. Safety specifications*
- ✓ EN 62471:2008 *Photobiological safety of lamps and lamp systems*
- ✓ EN 62493:2010 *Assessment of lighting equipment related to human exposure to electromagnetic fields*
- ✓ Eco design requirements of: EC 1194-2012

🇬🇧 Designed for  
LUMILIFE Great Britain



## Operation and maintenance

For wiring and circuitry work, always use the services offered by registered, certified electrical professionals.

- ✓ Store and use the lamps the same way as traditional lamps.
- ✓ Check your fixtures are properly wired and don't deliver voltage spike to lamps causing overheating/failure.
- ✓ Ambient temperature range -20 °C to 40 °C.
- ✓ Lamps should be kept free from contamination
- ✓ Ensure lamp is cool before removing.
- ✓ Switch off mains supply before installing/removing lamp.
- ✓ Not for use in totally enclosed recessed fixtures.

## Driver compatibility

The LUMiLiFE GU10 6W dimmable spotlight range are compatible with most leading trail-edge dimmers. Below is a brief overview.

Dimmer Brand	Dimmer Model	Dimmer Rated Power	Rated Voltage	Rated Frequency	Dim Range %			
					1-2	1-4	1-6	1-8
Aurora	DSPX400	60-400W	230V	50HZ	0.00% ~ 88.57%	0.00% ~ 89.29%	0.00% ~ 89.29%	0.00% ~ 89.29%
Varilight	JQPE401	10-400W	230V	50HZ	29.29% ~ 81.43%	28.57% ~ 81.43%	28.57% ~ 81.43%	28.57% ~ 80.71%
DIALl	DM400AP 60-400VA		230V	50HZ	14.29% ~ 90.71%	14.29% ~ 90.71%	15.71% ~ 91.43%	16.43% ~ 92.14%

LUMiLiFE is constantly developing and improving its products. For this reason, all product descriptions are intended as a general guide and we may change specifications time to time in the interest of product development, without prior notification or public announcement. Data in this sheet has been obtained in controlled experimental conditions. However, LUMiLiFE cannot accept any liability arising from the reliance on such data to the extent permitted by law.